



Transmitter w/alarm



811T Transmitters

DC Current, DC Voltage, and AC Current Input

Models

811T-0500: Universal DC input transmitter
811T-1500: Transmitter with limit alarm

Input Ranges

DC Current: 0 to 22mA
DC Voltage: $\pm 100V$ DC
AC Current: 0 to 20A AC (with external sensor)

Output Ranges

0 to 1mA, 0 to 20mA, 4 to 20mA DC
0 to 5V, 0 to 10V DC

Limit Alarm


SPDT electro-mechanical relay (-1500 unit only)

Power Requirement


10 to 36V DC

Approvals

CE marked. UL, cUL listed.

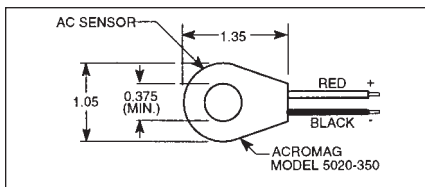

AC Current Sensor Model 5020-350 (ordered separately)

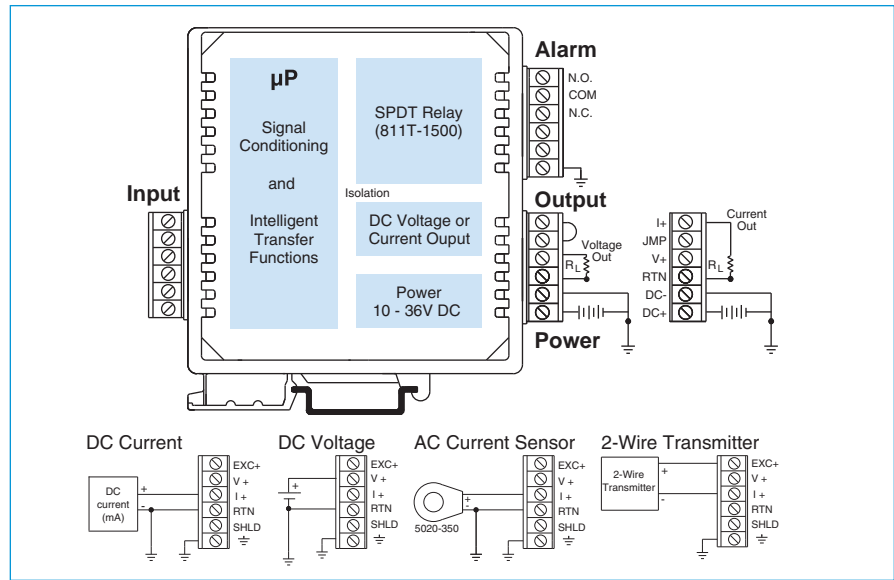

Description

These transmitters isolate and convert sensor inputs to noise-free, proportional DC current or voltage output signals. An optional relay output adds a local limit alarm function.

Each unit offers a selection of input and output ranges, as well as several signal conditioning options. This flexibility enables a single IntelliPack to handle a broad range of applications. As your needs change, you can easily reconfigure the unit for different ranges or functions.

Setup is very easy. IntelliPack modules are quickly configured with the user-friendly Windows software program. Field adjustments are simple with the module's front-panel push-buttons and status LEDs. Once configured, IntelliPacks operate independent of any host computer.

Special Features

- High-resolution Sigma-Delta A/D converter delivers high accuracy with low noise.
- Advanced microcontroller provides intelligent signal processing power for linearization, averaging, and square root computations.
- Windows XP/Vista/7 software configuration speeds setup and replacement.
- Multi-purpose inputs and outputs reduce spare stock requirements.
- Relay output option provides local limit alarm capability.

Performance

General Input

Analogue to Digital Converter (ADC)
16-bit Σ - Δ A/D converter.

Ambient Temperature Effect

Better than $\pm 0.005\%$ of input span per $^{\circ}C$ or $\pm 1\mu V$, whichever is greater.

Noise Rejection

Normal Mode: Better than 40dB @ 60Hz.
Common Mode: Better than 100dB @ 60Hz.

Input Response Time (for input step change)

Less than 100ms typical
to 98% of final output value.

Input Overvoltage Protection

Bipolar Transient Voltage Suppressors (TVS).

DC Current Input

DC Current Input Range (100% rangeable)

Input Ranges	Resolution
0 to 22mA DC	757nA
0 to 5mA DC	189nA

DC Current Input Impedance

24.9 ohms.

Excitation Supply (for 2-wire instruments)

+15V DC at 24mA maximum.

DC Current Input Accuracy

Better than $\pm 0.05\%$ of input span.

continued on next page



■ DC Voltage Input

DC Voltage Input Ranges (100% rangeable)

Input Ranges	Resolution
±100V DC	3.77mV
±50V DC	1.88mV
±25V DC	942µV
±12V DC	471µV
±6V DC	236µV
±3V DC	118µV

Input impedance

Greater than 500K ohms.

DC Voltage Input Accuracy

Better than ±0.05% of input span.

■ AC Current Input

AC Current Input Range (optional)

An optional external AC current sensor is required to monitor AC current signals (Model 5020-350).

AC Current Range	Primary Turns
0 to 20A AC	1
0 to 10A AC	2
0 to 5A AC	4
0 to 2A AC	10
0 to 1A AC	20

AC Current Input Accuracy

Better than ±0.05% of input span.

■ Output (DC V/mA)

D/A Converter

16-bit Σ-Δ.

Current Output

Ranges: 0-1mA, 0-20mA, 4-20mA.
Compliance: 10V minimum (500Ω load).
Accuracy: 0.025% of span.

Voltage Output

Ranges: 0-5V, 0-10V.
Compliance: 10mA maximum with short circuit protection. 1Ω output impedance.
Accuracy: 0.025% of span.

Accuracy (overall input to output)

0.075% of span.

■ Output (Relay)

Relay

One SPDT electro-mechanical relay.

Relay Ratings (CSA ratings)

25V DC @ 5A.
120/240V AC @ 5A.

Relay Time Delay

Adjustable alarm delay of up to 25 seconds.

Contact Material

Silver-cadmium oxide (AgCdO).

Expected Mechanical Life

20 million operations.

■ Environmental

Ambient Temperature

Operating: -25 to 70°C (-13 to 158°F).
Storage: -40 to 85°C (-40 to 185°F).

Relative Humidity

5 to 95%.

Power Requirements

10 to 36V DC. 110mA @ 24V. 170mA @ 15V.

Isolation (optical)

4-way (input/output/relay/power).
1500V AC for 60 seconds or 250V AC continuous.

Radiated Field Immunity (RFI)

EN61000-4-3, EN50082-1.

Electromagnetic Field Immunity (EMI)

Less than ±0.25% of output span effect under the influence of electromagnetic fields from switching solenoids, commutator motors, and drill motors.

Electrical Fast Transient (EFT)

EN61000-4-4, EN50082-1.

Surge Withstanding Capability (SWC)

EN61000-4-5, EN50082-1.

Electrostatic Discharge (ESD)

EN61000-4-2, EN50082-1.

Radiated Emissions

EN50081-1 for Class B equipment.

Approvals

CE, UL listed (USA, Canada).
UL3121 - general product safety.

■ Configuration

Software Configuration


Units are fully programmable via the Windows XP/Vista/7 IntelliPack Configuration Program. Configuration downloads from PC through EIA232 serial port using Acromag 800C-SIP kit.

Field Configuration

Output, zero/full-scale, relay setpoint and deadband are configurable via push-buttons and a standard calibrator.

LED Indicators

LEDs indicate power, status, calibration, and alarm.

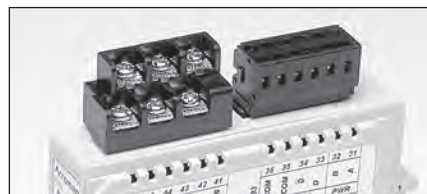

Optional terminal blocks: barrier strip (left) and spring clamp (right). Cage clamp terminal is standard.

■ Physical

Enclosure

Case: Self-extinguishing NYLON type 6.6 polyamide thermoplastic UL94 V-2 NEMA Type 1 enclosure.

Connectors (Removable Terminal Blocks)

Wire Range: AWG #14-22 (AWG #12 stranded only).

Printed Circuit Boards

Military grade FR-4 epoxy glass circuit board.

Dimensions

1.05W x 4.68H x 4.35D inches.
26.7W x 118.9H x 110.5D millimeters.

Shipping Weight

1 pound (0.45 Kg) packed.

■ Ordering Information

IMPORTANT: All IntelliPacks require initial software configuration (order 800C-SIP).

See Note 1 below.

811T-0500

IntelliPack transmitter unit (DC voltage/current input).

811T-1500

Same as above, plus an SPDT relay output.

5020-350

AC current sensor. Required for AC current inputs. See Page 205 for more information.

800C-SIP

Software Interface Package.
Only one kit is required for all IntelliPack models. See diagram on Page 83 for included parts.

5034-225

USB-to-RS232 adapter. See page 121 for more info.

PS5R-D24

Power supply (24V DC, 2.1A).
See Power Supplies on Page 199.

TBK-B01

Optional terminal block kit, barrier strip style, 2 pcs. (For use with 811T-0500 model.)

TBK-B02

Optional terminal block kit, barrier strip style, 4 pcs. (For use with 811T-1500 model with alarm.)

TBK-S01

Optional terminal block kit, spring clamp style, 2 pcs. (For use with 811T-0500 model.)


TBK-S02

Optional terminal block kit, spring clamp style, 4 pcs. (For use with 811T-1500 model with alarm.)

NOTE 1: To order factory configuration, call Acromag for a configuration form which must accompany your order. Also, append "-C" to model number (example: 811T-1500-C). 800C-SIP kit is still recommended.



Dimensions

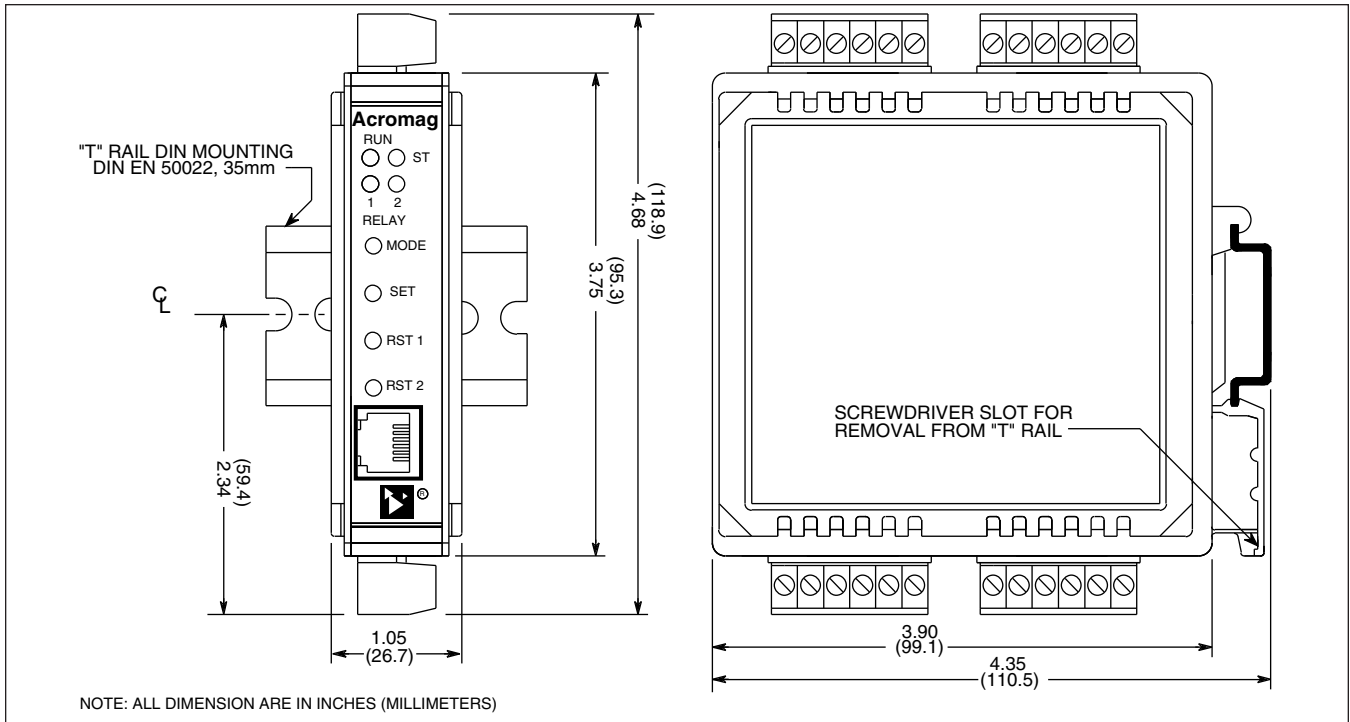



Accessories

Terminal Blocks





Barrier strip (left) and spring clamp (right).

Ordering Information

See individual I/O modules for compatibility.

Barrier Strip Terminal Blocks

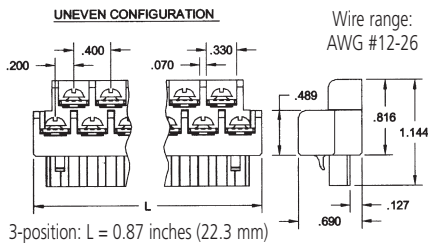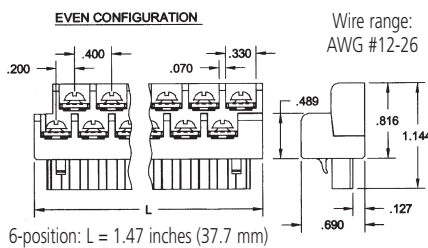


TBK-B01
Terminal block kit,
two 6-position pieces

TBK-B03
Terminal block kit,
one 3-position and
three 6-position pieces

TBK-B02
Terminal block kit,
four 6-position pieces

Spring Clamp Terminal Blocks

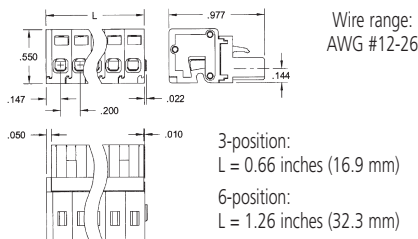

TBK-S01
Terminal block kit,
two 6-position pieces

TBK-S03
Terminal block kit,
one 3-position and
three 6-position pieces

TBK-S02
Terminal block kit,
four 6-position pieces

Mounting Hardware



DIN-Rail Mounting

For your convenience, Acromag offers several mounting accessories to simplify your system installation. Our 19" rack-mount kit provides a clean solution for mounting your I/O modules and a power supply. Or you can buy precut DIN rail strips for mounting on any flat surface.


Ordering Information

20RM-16-DIN
19" rack-mount kit with DIN rail.

DIN RAIL 3.0

DIN RAIL 16.7

DIN rail strip, Type T, 3 inches (75mm) or 16.7 inches (425mm)

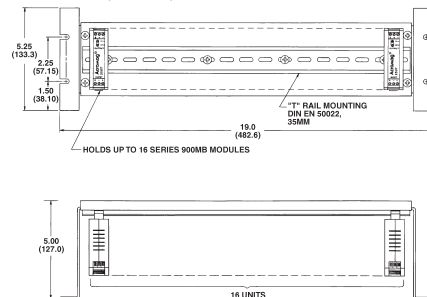

Power Supplies



50W Supply

Input Power Requirement
85 to 264V AC or 105 to 370V DC

Output
24V DC, 2.1A (50W)

Ordering Information

PS5R-D24
Universal 50W power supply

See Power Supplies on Page 199 for other models and more information.

USB / RS232 Adapter




Length: 3.15 in (8.0 cm)
Height: 0.80 in (2.03 cm)
Width: 1.75 in (4.44 cm)
Weight: 1.6 oz (45.36 g)

Ordering Information

5034-225
USB-to-RS232 adapter

AC Current Sensor

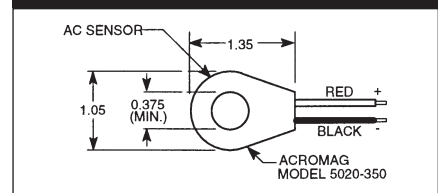

Ordering Information

5020-350
AC current sensor (See page 205)