


PCOM-B216VG-VI-ECC

Intel® Arrandale processor based Type VI COM Express module with ECC DDR3 SDRAM, HDMI, DisplayPort, Gigabit Ethernet and eSATA

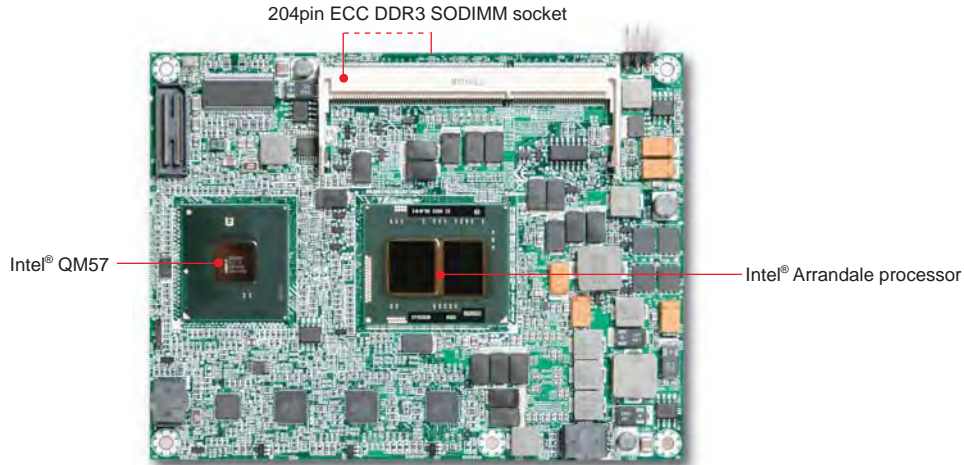

FEATURES

- The Intel® Arrandale and QM57 platform with turbo boost technology to maximize CPU & Graphic performance
- Intel® Arrandale platform support variously powerful processor from ultra low power to mainstream performance type
- Supports Intel® intelligent power sharing technology to reduce TDP (Thermal Design Power)
- Enhance Intel® vPro efficiency by Intel® 82577LM GbE PHY and AMT6.0 technology
- Support two DDR3 800/1066 SDRAM on two SODIMM sockets, up to 8GB memory size

GENERAL

Processor	CPU & Package: Intel® 45nm Arrandale Core i7/i5/i3 or Celeron P4505 processor up to 2.66 GHz with 4MB Cache in FC-BGA package DMI x4 Link: 4.8GT/s (Full-Duplex)
Chipset/Core Logic	Intel® QM57
System Memory	Up to 8GB ECC DDR3 800/1066 SDRAM on two SODIMM sockets
BIOS	UEFI AMI BIOS
Storage Devices	SATA: Support three SATA 300 and one eSATA drives
Expansion Interface	- Three DisplayPort (1st DisplayPort/HDMI/SDVO; 2nd DisplayPort/DVI/HDMI ; 3rd DisplayPort/DVI/HDMI) - Seven PCI Express x1 - LPC & SPI Interface - High definition audio interface
Hardware Monitoring	CPU Voltage and Temperature
Power Requirement	TBA
Dimension	Dimension: 125(L) x 95(W) mm
Environment	Operation Temperature: 0~60 °C Storage Temperature: -20~80 °C Operation Humidity: 5~90%

ORDERING GUIDE

Standard	PCOM-B216VG-VI-ECC Intel® Arrandale processor based Type VI COM Express module with DDR3 SDRAM, HDMI, DisplayPort, Gigabit Ethernet and eSATA
CPU Support List	Intel® Core i7-610E SV (4M Cache, 2.53 GHz) Intel® Core i7-620LE LV (4M Cache, 2.00 GHz) Intel® Core i7-620UE ULV (4M Cache, 1.06 GHz) Intel® Core i5-520E SV (3M Cache, 2.40 GHz) Intel® Celeron P4505 SV (2M Cache, 1.86 GHz)

* Specifications are subject to change without notice.

* Celeron M® and Pentium® M are registered trademarks of Intel Corporation.

* Other trademarks, logo, brands and company are the property of their respective owners.

I/O

MIO	N/A
IrDA	N/A
Ethernet	One Intel® 82577LM Gigabit Ethernet PHY
Audio	N/A
USB	Eight USB ports
Keyboard & Mouse	N/A

DISPLAY

Graphic Controller	Intel® Arrandale integrated Graphics Media Accelerator (Gen 5.75 with 12 execution units)
Graphic Memory	Dynamic share system memory over 512MB (Intel® DVMT 5.0)
Display Interface	- Support CRT, LVDS, HDMI, DisplayPort (DP) and DVI-D interfaces - CRT(2048x1536@85Hz refresh); HDMI/DVI-D(1920x1200); DP(2560x1600)



American Portwell

Fremont CA Tel: +1-510-403-3399

E-mail: info@portwell.com

<http://www.portwell.com>