


OPS880

Open Pluggable Specification (OPS) Digital Signage Player with 4th Gen Intel® Core™ Processor, Intel® QM87 and TPM 1.2

Features

- Open Pluggable Specification (OPS) compliance
- 4th gen Intel® Core™ i7/i5/i3 processor (Haswell)
- Intel® QM87 chipset
- DDR3L-1600 SO-DIMM, up to 8GB
- 2 USB 3.0 ports and 2 PCIe Mini Card slots
- Intel® AMT (Active Management Technology) 9.0
- HDMI interface for 2nd display
- Supports 4K resolution
- Supports TPM 1.2

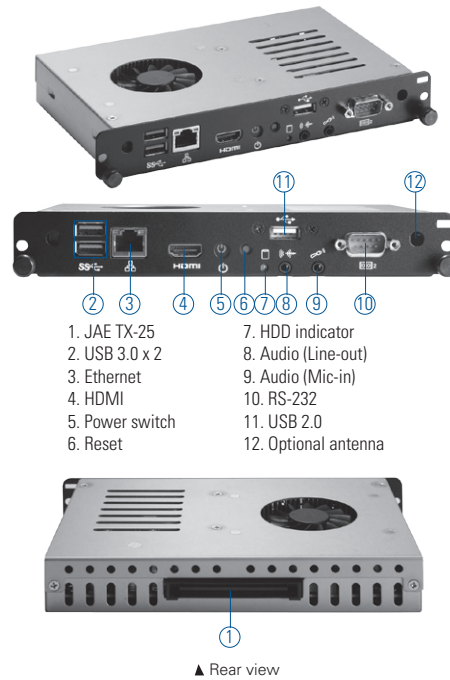

Specifications

Main System	CPU	4th generation Intel® Core™ i7/i5/i3 processor (Haswell)
	Chipset	Intel® QM87
	System Memory	1 x 204-pin DDR3L-1600 SO-DIMM, up to 8GB
	Storage	1 x mSATA
	BIOS	AMI UEFI BIOS with OA 3.0 built
	Watchdog Timer	255 levels, 1 ~ 255 sec.
I/O	2 x USB 3.0	
	1 x USB 2.0	
	1 x 10/100/1000 Mbps Ethernet (Intel® i217LM)	
	1 x HDMI	
	1 x RS-232 (COM 2)	
	1 x Power on/off button	
	1 x Reset button	
	1 x Audio (Line-out)	
	1 x Audio (Mic-in)	
	1 x DisplayPort (via OPS JAE interconnector) (Pure DP)	
	2 x USB 2.0 (via OPS JAE interconnector)	
	1 x USB 3.0 (via OPS JAE interconnector)	
	1 x HDMI/DVI (via OPS JAE interconnector)	
1 x Audio (Line-out, via OPS JAE interconnector)		
1 x UART (TX/RX, via OPS JAE interconnector) (COM1)		
Indicator	1 x LED for system power ON	
WiFi	802.11 b/g/n (optional)	
Expansion Slot	2 x full-size PCIe Mini card	
	1 x SIM slot	
Dimensions	200 mm (7.87") (W) x 119 mm (4.68") x 30 mm (1.18")	
Packing Dimensions	270 mm (10.63") (W) x 197 mm (7.76") x 70mm (2.76")	
Weight (net/gross)	1 kg (2.21 lb)/1.5 kg (3.3 lb)	
Environmental	0°C ~ +45°C (+32°F ~ +113°F) (with airflow 1.2m/s)	

Packing

- 1 x Driver CD
- 1 x Thermal grease
- 2 x M2 x 5 screw
- 2 x M4 x 6 screw

Optional OS Installation

Windows® 7, Windows® 8.1

Ordering Information

Standard

OPS880-i3 (P/N:E22M880102)	OPS digital signage player with Intel® Core™ i3-4100E processor onboard
OPS880-i5 (P/N:E22M880101)	OPS digital signage player with Intel® Core™ i5-4400E processor onboard
OPS880-i7 (P/N:E22M880100)	OPS digital signage player with Intel® Core™ i7-4700EQ processor onboard

Optional

AX93157	OPS docking board
AX93167	OPS docking board with 4K solution

Dimensions

