


OPS871-HM

Open Pluggable Specification (OPS) Digital Signage Player with 3rd Gen Intel® Core™ i5/i3 Processor, Intel® HM76 and TPM 1.2

Features

- Open Pluggable Specification (OPS) compliance
- Socket G2 (rPGA988B) 3rd gen Intel® Core™ i5/i3 processor (Ivy Bridge)
- Intel® HM76 chipset
- DDR3-1600 SO-DIMM, up to 8GB
- 2 USB 3.0 ports and PCIe Mini Card slot
- pluggable HDD for easy maintenance
- Easy to change DRAM
- HDMI for 2nd display
- Supports TPM 1.2

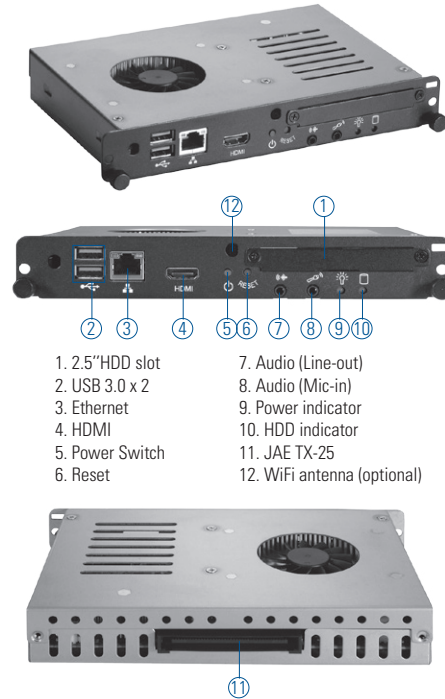

1. 2.5" HDD slot
2. USB 3.0 x 2
3. Ethernet
4. HDMI
5. Power Switch
6. Reset
7. Audio (Line-out)
8. Audio (Mic-in)
9. Power indicator
10. HDD indicator
11. JAE TX-25
12. WiFi antenna (optional)

▲ Rear view

Specifications

Main System	CPU	Socket G2 (rPGA988B) 3rd generation Intel® Core™ i5/i3 processors (Ivy Bridge)
	Chipset	Intel® HM76
	System Memory	1 x 204-pin DDR3-1600 SO-DIMM, up to 8GB
	Storage	1 x 2.5" SATA HDD tray
	BIOS	AMI UEFI BIOS with OA 3.0 built
	Watchdog Timer	255 levels, 1 ~ 255 sec.
IO	2 x USB 3.0	
	1 x 10/100/1000 Mbps Ethernet (Intel® 82579LM)	
	1 x Power on/off button	
	1 x Reset button	
	1 x HDMI	
	1 x Audio (Line-out/Mic-in)	
	1 x DisplayPort (via OPS JAE interconnector) (Pure DP)	
	2 x USB 2.0 (via OPS JAE interconnector)	
	1 x USB 3.0 (via OPS JAE interconnector)	
	1 x HDMI/DVI (via OPS JAE interconnector)	
1 x Audio (Line-out, via OPS JAE interconnector)		
1 x UART (TX/RX, via OPS JAE interconnector)		
Indicator	1 x LED for system power on	
	1 x LED for HDD active	
WiFi	802.11 b/g/n (optional)	
Expansion Slot	1 x PCIe Mini Card	
Dimensions	200 mm (7.87") (W) x 119 mm (4.68") x 30 mm (1.18")	
Packing Dimensions	270 mm (10.63") (W) x 197 mm (7.76") x 70 mm (2.76")	
Weight (net/gross)	1 kg (2.2 lb)/1.5 kg (3.3 lb)	
Environmental	0°C ~ +45°C (+32°F ~ +113°F) (with airflow 1.2m/s)	

Packing

- 1 x Driver CD
- 1 x HDD mylar
- 1 x Thermal grease (syringe 1G)
- 2 x M3 x 4 screw
- 2 x M4 x 6 screw

Optional OS Installation

Windows® 7, Windows® 8.1

Ordering Information

Standard

OPS871-HM (P/N:E22M871101)	OPS digital signage player with socket G2 3rd generation Intel® Core™ processor
OPS871-HM-SF (P/N:E22M871102)	OPS digital signage player with socket G2 3rd generation Intel® Core™ processor with smart fan

Optional

AX93157	OPS docking board
---------	-------------------

* Specifications and certifications may vary contingent on options.

Dimensions

