

GOT3157W-832-PCT

15.6" WXGA TFT Fanless Multi Touch Panel Computer with Intel® Atom™ Processor (-10°C ~ +50°C)

NEW



- | | |
|--------------------------------------|---------------------------|
| 1. Power switch | 7. USB 2.0 x 2 |
| 2. Terminal block for DC power input | 8. Audio(Line-out) |
| 3. USB 2.0 x 2 | 9. CF slot |
| 4. COM 1 (RS-232/422/485) | 10. Backlight switch |
| 5. COM 2 (RS-232) | 11. Brightness adjustment |
| 6. Ethernet x 2 | |



Fanless

Low Power

Extended Temperature

DDR3

AiRD

Introduction

The GOT-3157W is a 15.6" WXGA fanless touch panel computer. By supporting a wide temperature range from -10°C +50°C, it can be used in any harsh environment. The unit adopts 15.6" WXGA TFT-LCD and low power consumption Intel® Atom™ processor. With the growing demand of wireless application, it provides one Mini card slot for wireless network connection. By just plugging in the Mini card WLAN card, customers have instant access wireless LAN. This model is suitable for many applications including transportation, train, control platform of ships, heavy industry, and oil pipe monitoring systems.

Wide-temperature (-10°C ~ +50°C) supported


The GOT-3157W adopts unique extended temperature technology, with a temperature range from -10°C ~ +50°C, with fanless cooling system and compact design for harsh environment.

WLAN antenna supported (optional)


The GOT3157W provides a Mini card slot and WLAN antenna for wireless network connections. By simply plugging in the wireless LAN card, customers can use the unit in a wireless environment.

Features

- 15.6" WXGA wide screen with modulated design
- Multi touch 15.6" projected capacitive
- Fanless design with Intel® Atom™ processor D2550 1.86 GHz
- Supports 2.5" SATA HDD & CompactFlash™ type II (optional)
- Supports WLAN module & antenna (optional)
- Supports 4 USB 2.0 & 2 COM ports
- IP65 front bezel
- Supports panel mount and optional VESA arm/desktop stand/ wall mount
- Supports wide temperature range of -10°C ~ +50°C



▲ Modulated design

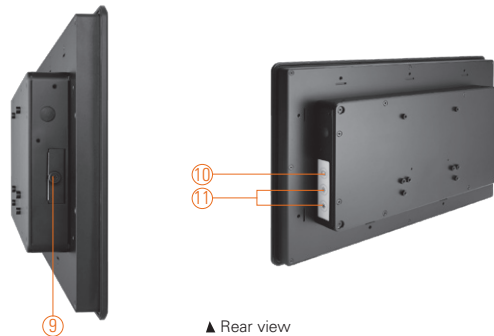

▲ Rear view

Specifications

Front Bezel	IP65 front bezel	
LCD Panel	Display Type	15.6" WXGA TFF LCD
	Brightness (cd/m ²)	300 nits
	Resolution	1366 x 768
Main System	CPU	Intel® Atom™ processor D2550 1.86 GHz
	Chipset	Intel® NM10
	System Memory	1 x 204-pin DDR3 max. up to 4 GB
	BIOS	AMI 8 Mbit with RPL/PXE LAN boot ROM
	Storage	1 x 2.5" SATA HDD 1 x CompactFlash™ (optional)
	Watchdog Timer	255 levels, 0-255 sec.
	Onboard Graphics	Integrated Intel® GFX

Specifications

I/O Connector	1 x RS-232 (COM 1) 1 x RS-232/422/485 (COM 2) 1 x Switch for power on/off (ATX) 1 x Audio (Line-out) 4 x USB 2.0 2 x 10/100/1000Mbps Ethernet
Expansion Interface	1 x PCIe Mini Card slot
Touchscreen	Capacitive multi-touch
Power Supply	10-30VDC
Dimensions	396 mm (15.6") (W) x 53.9 mm (2.12") (D) x 247.1 mm (9.73") (H)
Packing Dimensions	525 mm (20.67") x 470 mm (18.51") x 186 mm (7.32")
Weight (net/gross)	5.0 kg (11.02 lb)/7.0 kg (15.43 lb)
Environment	Operating temperature: -10°C ~ +50°C (14°F ~ 122°F) Storage Temperature: -20°C ~ +60°C (-4°F ~ +140°F) Relative humidity: 20% ~ 90% @ 40°C; non-condensing Operation vibration: 2G, 10 ~ 500Hz, random for CompactFlash™
Certification	CE

* W.T.: Wide Temperature. All W.T. supported products have to be sorted by Axiomtek.

Ordering Information

GOT3157W-832-PCT	15.6" WXGA TFT fanless multi touch panel computer with Intel® Atom™ D2550
------------------	---------------------------------------------------------------------------

Optional EOS Installation

WES 7T (32-bit, single-touch function)
WES 7P (32-bit, multi-touch function)

Optional OS Installation

Windows® 7 (32-bit)

Overview

Industrial Panel Computers & Monitors

Heavy-duty Fanless Touch Panel Computers

Digital Signage Solutions

Healthcare & Medical Solutions

Open Frame Panel Computers

Accessories



▲ Ideal for factory automation & self-service kiosk in retail

Dimensions

