


OPS860

Socket G2 Intel® Core™ i7/ i5/ i3 Open Pluggable Specification (OPS) Digital Signage Player with Intel® QM67 Chipset



- | | |
|------------------|-----------------------------|
| 1. 2.5" HDD Slot | 7. Audio (Line-out) |
| 2. USB 2.0 x 2 | 8. Audio (Mic-in) |
| 3. Ethernet | 9. Power indicator |
| 4. VGA | 10. HDD indicator |
| 5. Power switch | 11. JAE TX-25 |
| 6. Reset | 12. WiFi antenna (optional) |

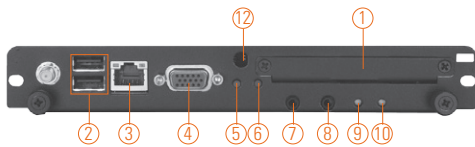

Specifications

Main System	CPU	Supports Socket G2 (rPGA988B) 2nd generation Intel® Core™ i7/ i5/ i3 processors (Sandy Bridge) (optional)
	Chipset	Intel® QM67 PCH
	System Memory	1 x DDR3-1333 SO-DIMM max. up to 8 GB
	Storage	1 x 2.5" SATA HDD tray
	BIOS	AMI UEFI BIOS with OA 3.0 built
	Watchdog Timer	255 levels, 1 ~ 255 sec.
IO	2 x USB 2.0	
	1 x 10/100/1000Mbps Ethernet	
	1 x VGA	
	1 x power on/off button	
	1 x reset button	
	1 x Audio (Line-out/ Mic-in)	
	1 x DVI/HDMI (via OPS JAE interconnector)	
	1 x DisplayPort (via OPS JAE interconnector) (Pure DP)	
	3 x USB 2.0 (via OPS JAE interconnector)	
	1 x Audio (Line-out, via OPS JAE interconnector)	
1 x UART (TX/RX via OPS JAE interconnector)		
Indicator	1 x LED for system power ON	
	1 x LED for HDD active	
WiFi	Supports 802.11 b/g/n (optional)	
Expansion Slot	1 x PCI Express Mini Card	
Dimensions	200 mm (7.87") (W) x 119 mm (4.68") (D) x 30 mm (1.18") (H)	
	Packing Dimensions	270 mm (10.63") (W) x 197 mm (7.76") (D) x 70 mm (2.76") (H)
Weight (net/gross)	1 kg (2.2 lb)/1.5 kg (3.3 lb)	
Environmental	0°C ~ +45°C (+32°F ~ +113°F) (With airflow 1.2m/s)	

Packing

- 1 x driver CD
- 1 x HDD mylar x 1
- 1 x thermal grease (syringe 1G)
- 2 x M3 x 4 screw
- 2 x M4 x 6 screw

Features

- Open Pluggable Specification (OPS) compliance
- Supports Socket G2 (rPGA988B) 2nd generation Intel® Core™ i7/ i5/ i3 processors
- Intel® QM67 PCH
- DDR3-1333 SO-DIMM max. up to 8 GB
- PCIe Express Mini Card
- Supports Intel® AMT (Active Management Technology) 7.0
- Easy maintenance: pluggable HDD and easy-to-change DRAM
- VGA connector



▲ Rear view

Optional EOS Installation

Windows® 7 Embedded

Optional OS Installation

Windows® XP, Windows® 7

Ordering Information

Standard

OPS860	OPS digital signage player supports Socket G2 2nd Gen Intel® Core™ processor
(P/N: E22M860100)	

Optional

OFF320	31.5" full HD digital signage display
OFF321	31.5" LED backlight full HD digital signage display
AX93157	OPS docking board

* Specification and certifications are based on options and may vary.

Dimensions

