


NA361

Compact Network Appliance Platform with Intel® Atom™ Processor C2358
up to 1.70 GHz and 6 LANs

Features

- Intel® Atom™ processor C2358 (Rangeley)
- Two DDR3-1600 U-DIMM, up to 16GB memory
- Six 10/100/1000 Mbps Ethernet ports (Intel® i354 & Intel® i210)
- Wi-Fi/3G/LTE through PCI Express Mini Card for optional
- Supports Intel® QuickAssist Technology
- Supports Intel® Data Plane Development Kit (Intel® DPDK)
- Suitable for VPN, network bandwidth controller, firewall and UTM applications

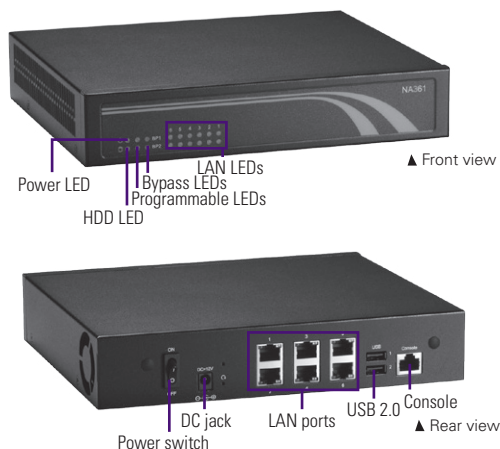

Specifications

System	
CPU	Intel® Atom™ processor C2358 (2-core) (Rangeley)
Chipset	SoC Integrated
Memory	2 x DDR3-1600 U-DIMM, up to 16GB non-buffer non-ECC/ECC memory
BIOS	AMI SPI Flash BIOS
Storage	1 x 2.5" SATA HDD 1 x CompactFlash™ type-II 1 x mSATA (optional) 1 x CFast™ (optional)
Network Interface	6 x 10/100/1000 Mbps Ethernet (Intel® i354 & Intel® i210) 4 x RJ-45 + 2 x SFP (optional)
I/O Interface	1 x RS-232 (RJ-type) 2 x USB 2.0 6 x RJ-45
Other Features	LAN Bypass function through latch relay (two pairs) for optional
Expansion Slot	1 x PCI Express Mini Card (USB interface)
Watchdog Timer	255 stepping for system reset 8 stepping for LAN Bypass
Power Supply	1 x 12V, 5A power adapter
OS Compatibility	Yocto, Linux

Mechanical/ Environmental

Form Factor	1U desktop
LED	Power, HDD, GPIO programmable, LAN Bypass, Link/Act with transfer rate
Operating Temp.	0°C ~ +40°C (+32°F ~ +104°F)
Humidity	10% ~ 95% RH, non-condensing
Chassis Material	Steel
Dimensions	44 mm (1.73") (H) x 231 mm (9.09") (W) x 197 mm (7.76")
Weight (net/gross)	2.35 kg (5.18 lb)/2.61 kg (5.75 lb)
Certificates	FCC class B/CE class B

Ordering Information

Standard	
NA361-D6GI-CF-US (P/N: E26E361100)	Compact network appliance with Intel® Atom™ processor C2358 and up to 6 GbE LANs

Optional	
5916E552000E	DB9F-RJ-45 1.8M console cable for Cisco

* Specifications and certifications may vary contingent on options.

Packing List

1 x DC power adapter 12V/5A
1 x Power cord
1 x SATA cable

Dimensions

