


IMB-150

Mini-ITX Motherboard

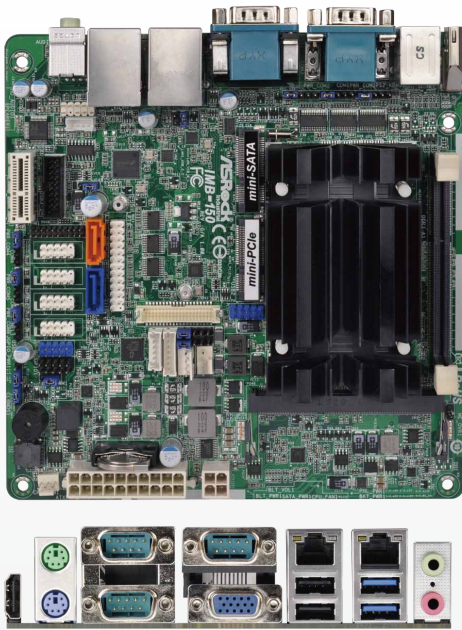

Spotlight Features

- Intel® Atom™ Baytrail-M/D Processor
- Integrated Intel® Gen7 Intel Graphics DX 11*, OGL3.2
- Supports Dual Channel DDR3 1333MHz, 2 x SO-DIMM, up to 8GB system memory
- 1 x COM (RS-232/422/485), 5 x COM (RS-232)
- 1 x HDMI, 1 x D-Sub, 1 x Dual Channel 24-bit LVDS
- 4 x USB 3.0, 6 x USB 2.0, 2 x SATA2
- 1 x mini-PCIe, 1 x mSATA(shared)
- Gigabit LAN : 2 x Realtek Lan
- 9~19 V DC-in / ATX Power Support

Specifications

Processor System	
Dimension	Mini-ITX (6.7-in x 6.7-in)
CPU	Intel® Atom™ Baytrail-M/D Processor Supports Hyper-Threading Technology
Core Number	4
Max Speed	(By CPU)
L3 Cache	2MB
Chipset	N/A
BIOS	UEFI
Expansion Slot	
PCI	0
Mini-PCIe	1 (Full Size)
mSATA	1
PCIe	1
CFast Card Socket	0
Memory	
Technology	Dual Channel DDR3 1333 MHz SDRAM
Max.	8GB
Socket	2 x SO-DIMM
Graphics	
Controller	Intel® Gen7 Intel Graphics DX 11*, OGL3.2
VRAM	Shared Memory
VGA	Supports max. resolution 1920 x 1200
LVDS	Dual channel 24-bit, max resolution 1920 x 1200@60Hz
HDMI	Supports HDMI 1.3a, max resolution 1920x1200
DVI	No
Display Port	No
Multi Display	Yes (Dual Display)
Ethernet	
Interface	10/100/1000 Mbps
Controller	GbE LAN: 2 x Realtek RTL8111E-VL
Connector	2 x RJ-45
SATA	
Max Data Transfer Rate	SATA2 (3.0Gb/s)

Rear I/O	
VGA	1
HDMI	1
DVI-I/D	0
Display Port	0
Ethernet	2
USB	4 (2 x USB 3.0 compliant, 2 x USB 2.0 compliant)
Audio	2 (Mic-in, Line-out)
Serial	1 (RS-232/422/485) + 2 (RS232)
PS/2	2 (1 x keyboard and 1 x mouse)

Internal Connector	
USB	6 (2 x USB 3.0 compliant, 4 x USB 2.0 compliant)
LVDS/Inverter	1/1
VGA	1 (shared with rear I/O VGA COM)
Serial	3 (RS-232)
SATA	2 x SATA2 (3.0Gb/s)
m-SATA	1 (shared)
Mini-PCIe	1
Parallel	1
IrDA	0
GPIO	4 x GPI + 4 x GPO
SATA PWR Output Con	1
Speaker Header	1

Watchdog Timer	
Output	From Super I/O to drag RESETCON#
Interval	256 segments, 0,1,2...255sec/min


Power Requirements	
Input PWR	9-19V DC-In (4-pin ATX PWR Con)
Power On	AT/ATX Supported AT : Directly PWR on as Power input ready ATX: Press Button to PWR on after Power input ready

Environment	
Operating Temperature	0°C – 60°C

Board Diagram

IMB-150 R1.00

Mini-ITX Form Factor

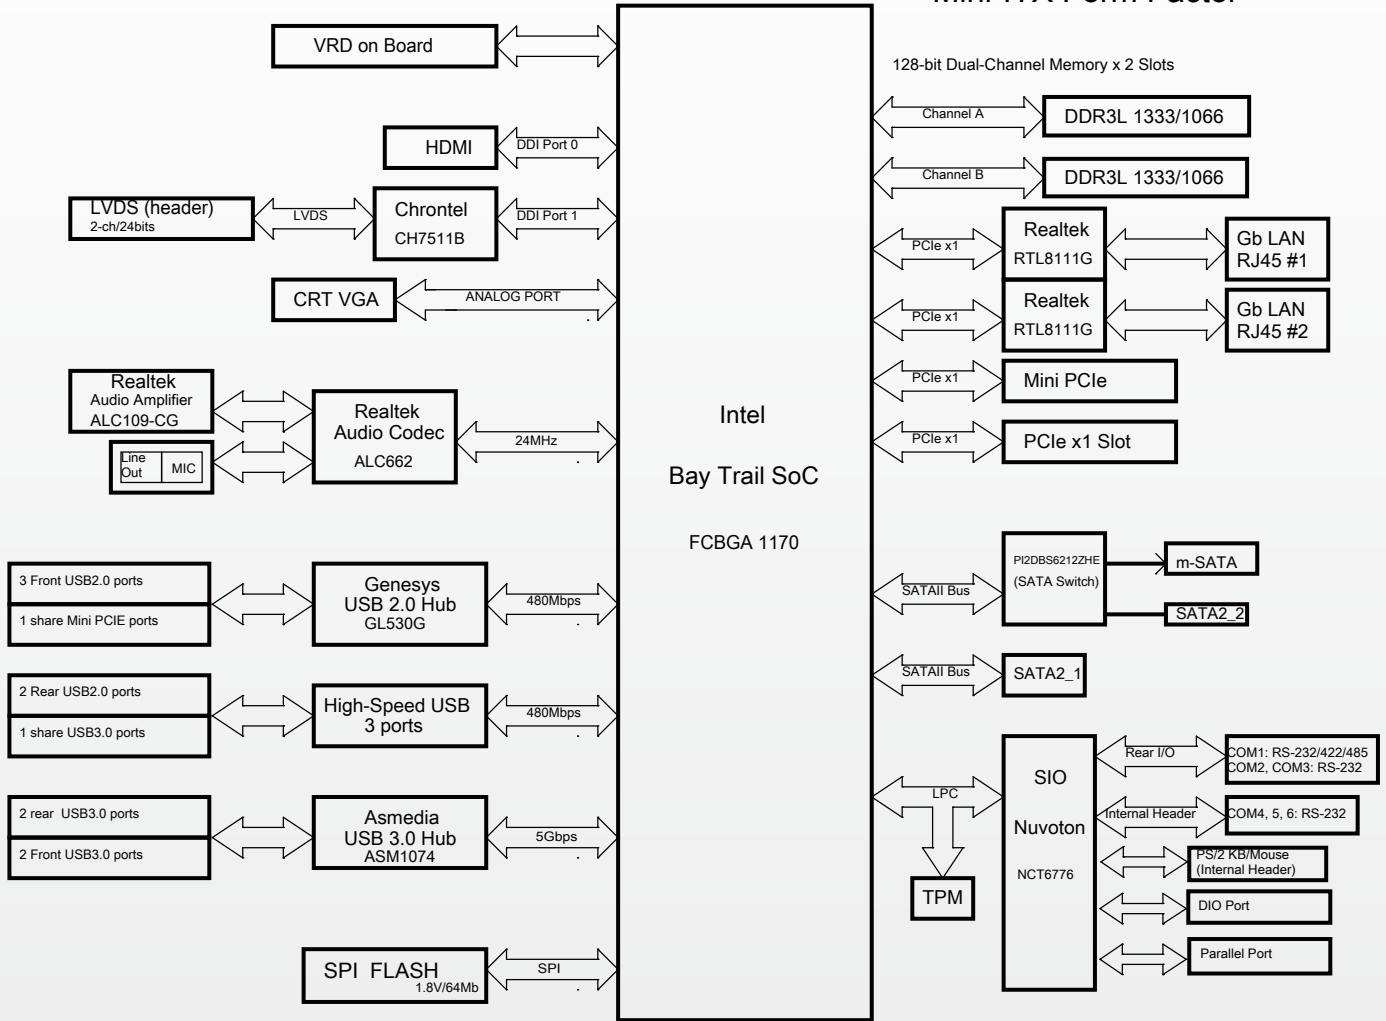

IPC Motherboards Focused Markets

ASRock IMB solutions can be widely used for industrial applications, such as process control, data acquisition, and so on. IMB-PCs are typically panel mounted and often incorporate touch screens for user interaction.

