

EX94000 Series

Hardened Unmanaged 8-port 10/100BASE Ethernet Switch



Overview

EtherWAN's EX94000 Series is a hardened unmanaged Fast Ethernet switching platform, designed for easy deployment in harsh environments. The EX94000 Series supports 12 to 48VDC redundant power input, and also provides relay alarm while power failure or port link down occur. The EX94000 provides 4kV surge protection, and is designed for hazardous locations (Class 1 Div.2 / ATEX Zone 2).

The EX94000 is equipped with eight Fast Ethernet ports, or a combination of Fast Ethernet copper ports and two 100FX ports for long distance connectivity. This versatile switch features 10/100Mbps transfer speeds, full/half-duplex auto-negotiation and auto MDI/MDIX operation allowing you to connect your network devices without hassles.

The EX94000 is feature-rich with full wire speed Fast Ethernet throughput, QoS (Quality of Service), IEEE802.3az EEE (Energy Efficient Ethernet) and Broadcast storm protection. The EX94000 Series is built with relay alarm to notify users when power fails or link down occurs. It also supports Broadcast storm protection by enabling the DIP switch. The 94000 Series is housed with DIN rail mountable metal compact case which is an ideal solution for applications in harsh environments.

EtherWAN – "When Connectivity is Crucial."

Spotlight

- **Hardened Grade**
 - Supports -40°C to 75°C (-40°F to 167°F) operating temperature
- **Broadcast Storm Protection**
 - Enable/disable broadcast storm protection by DIP switch that provide another level of flexibility on industrial applications
- **Fiber Connectivity**
 - Up to two 100BASE-FX ports with SC, ST, WDM and SFP options
- **High Surge Protection and Hazardous Location Certification**
 - Provides 4kV surge protection
 - Designed for hazardous locations (Class 1 Div.2 / ATEX Zone 2)
- **High Reliability**
 - Fanless design
 - No moving parts

Hardware Specifications

Technology

Standards

- IEEE802.3u 100BASE-TX/FX
- IEEE802.3x full-duplex flow control
- IEEE802.3az Energy Efficient Ethernet
- IEEE802.1p Quality of Service (QoS)

Forward and Filtering Rate

- 14,880pps for 10Mbps
- 148,810pps for 100Mbps

Packet Buffer Memory

- 448K bits

Processing Type

- Store-and-Forward
- Auto Negotiation
- Half-duplex back-pressure and IEEE802.3x full-duplex flow control
- Auto MDI/MDIX

Address Table Size

- 1K MAC addresses

Power

Input Voltage

- 12 to 48VDC (Terminal Block)

Power Consumption

- 2.47W@24VDC

Protection

- Reverse polarity protection

Mechanical

Casing

- Aluminum Case
- IP30

Dimensions

- 50mm (W) x 110mm (D) x 135mm (H)
(1.97" (W) x 4.33" (D) x 5.31" (H))

Weight

- 0.62Kg (1.37lbs)

Installation

- DIN-Rail (Top hat type 35mm) or Panel mounting

Interface

Ethernet Ports

- 10/100BASE-TX: 8, 6 or 4 ports
- 100BASE-FX: 0, 2 or 1 ports

LED Indicators

- Per Unit: Power 1 (Green),
Power 2 (Green),
Fault (Red)
- Per Port: Link/Activity (Green)

Alarm Contact

- One relay output with current 1A @ 250VAC
- Supports normal close and normal open

Environment

Operating Temperature

- -40°C to 75°C (-40°F to 167°F)
Tested @ -40°C to 85°C (-40°F to 185°F)

Storage Temperature

- -40°C to 85°C (-40°F to 185°F)

Ambient Relative Humidity

- 5% to 95% (non-condensing)

Regulatory Approvals

ISO

- Manufactured in an ISO9001 facility

Safety

UL60950-1 (Pending)

UL ISA12.12.01 Class I Div. 2 / ATEX Zone 2 for hazardous locations (Pending)

EMI

FCC Part 15B, Class A

VCCI Class A

EN61000-6-4

EN55022 Class A

EMS

EN61000-6-2

- EN61000-4-2 (ESD Standards)
- EN61000-4-3 (Radiated FRI Standards)
- EN61000-4-4 (Burst Standards)
- EN61000-4-5 (Surge Standards)
Signal ports: ± 4 kV line-to-earth
DC power ports: ± 4 kV line-to-earth
 ± 2 kV line-to-line
- EN61000-4-6 (Induced RFI Standards)
- EN61000-4-8 (Magnetic Field Standards)

Environmental Test Compliance



IEC60068-2-6 Fc (Vibration)

IEC60068-2-27 Ea (Shock)


FED STD 101C Method 5007.1 (Free fall w/ package)

- Tested with Cross Weight and Drop High standard table


Dimensions

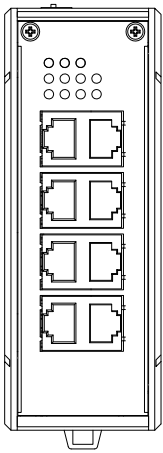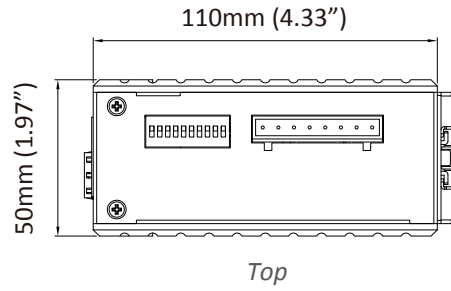



Front
EX94008

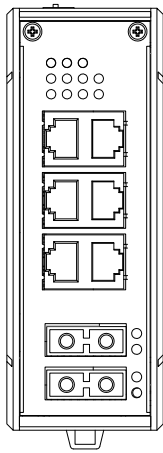


Front
EX94026

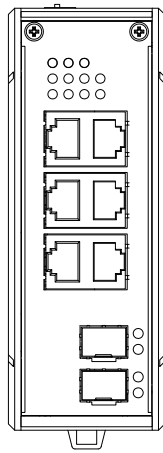


Front
EX94026

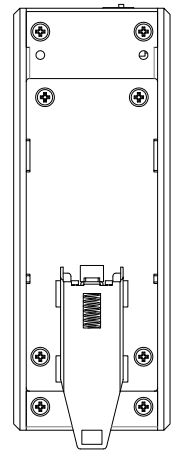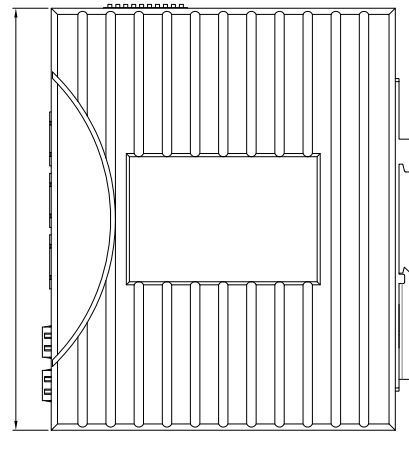


Back

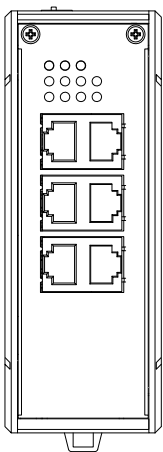

Front
EX94006

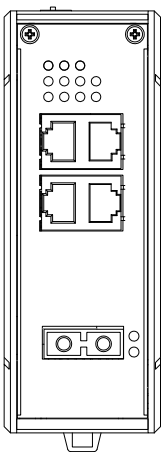

Front
EX94014

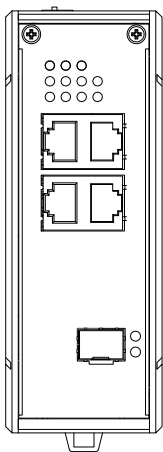

Front
EX94014



Bottom

Ordering Information

Model

EX94008-00-1-AA	Hardened Unmanaged 8-port 10/100BASE-TX Ethernet Switch
EX94006-00-1-AA	Hardened Unmanaged 6-port 10/100BASE-TX Ethernet Switch
EX94026-XY-1-AA	Hardened Unmanaged 6-port 10/100BASE-TX + 2-port 100BASE-FX Ethernet Switch
EX94014-XY-1-AA	Hardened Unmanaged 4-port 10/100BASE-TX + 1-port 100BASE-FX Ethernet Switch

* DIN-Rail mounting kit included

100FX Fiber Options (XY)

1A	Multi Mode (SC) -2Km
1B	Multi Mode (ST) -2Km
2A	Single Mode (SC) -20Km
2D	Single Mode (ST) -20Km
2E	Single Mode (SC) WDM-TX:1310nm/RX:1550nm -20Km
2G	Single Mode (SC) WDM-TX:1550nm/RX:1310nm -20Km
V	100BASE SFP

*More 100FX Fiber options also available upon request.

Optional Accessories

KP-AA96-480	Panel Mounting Kit
KR-BKEL900	Rack Mounting Kit
DR-30-24	30W/1.5A DIN-Rail 24VDC Industrial Power Supply (for Terminal Block)
DR-60-24	60W/2.5A DIN-Rail 24VDC Industrial Power Supply (for Terminal Block)
DR-75-24	75W/3.2A DIN-Rail 24VDC Industrial Power Supply (for Terminal Block)