

Vented 3R Enclosure

Application -

Designed to house electrical controls, drives, instruments and components used in an outdoor environment to provide a degree of protection for the equipment inside the enclosure against ingress of solid foreign objects (falling dirt); and provide a degree of protection with respect to the harmful effects on the equipment due to the ingress of water (rain, sleet, snow). For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- 0.075 Galvannealed steel
- Black Quarter turn latches and Padlock Wing knob
- Provisions for subpanel.
- Doors open 180 degrees
- Concealed Hinges
- Vented top hood with bug screen
- Top mounted fans
- Vented rain hood with Filter kits in door
- Din Rail mounting provisions inside top for installation of Thermostat and terminals
- Oil resistant gasket
- Ground studs on door and body
- Mounting Holes for optional Mounting Strips
- 3/8-16 Grounding Kit.
- Subpanel mounting hardware.

Finish -

White powder coat inside and out.
Optional panels are powder coated white.

IS7 - Industry Standards -

- NEMA Type 3R
- UL Listed Type 3R
- CSA Type 3R
- IEC 60529 IP32

VENTED 3R ENCLOSURES





ENCLOSURE PRODUCT CODE N3											
Catalog No.	H	W	D	Fan Size	Fan Qty.	System CFM	Filter Size	Filter Qty.	Industry Standard	List Price	Sub-Panel
SCE-29VR2412	29.00	24.00	12.00	6"	1	107	FLT66	2	IS7	672.08	SCE-24P24
SCE-35VR2412	35.00	24.00	12.00	6"	1	107	FLT66	2	IS7	751.88	SCE-30P24
SCE-41VR2412	41.00	24.00	12.00	6"	1	107	FLT66	2	IS7	850.26	SCE-36P24
SCE-47VR2414	47.00	24.00	14.00	10"	1	300	FLT66	2	IS7	1027.03	SCE-42P24
SCE-53VR3616	53.00	36.00	16.00	10"	1	300	FLT88	2	IS7	1652.13	SCE-48P36
SCE-65VR3616	65.00	36.00	16.00	10"	2	600	FLT88	2	IS7	1868.78	SCE-60P36



Phone (989) 799-6871
Fax (989) 799-4524



VENTED 3R ENCLOSURES TECHNICAL DATA

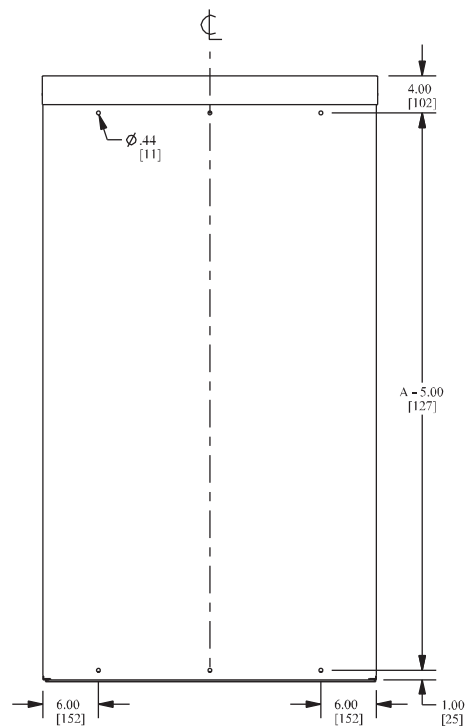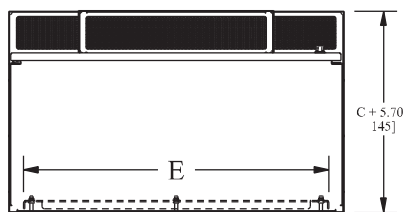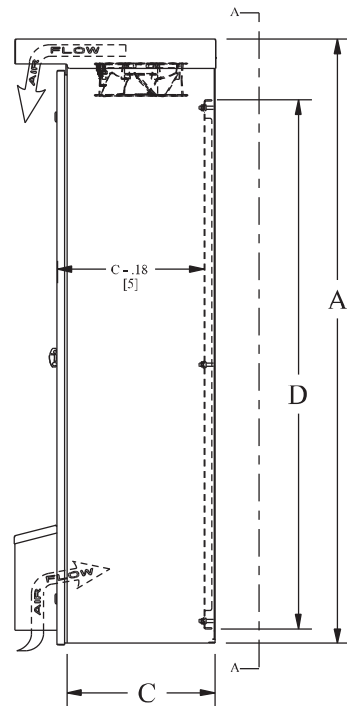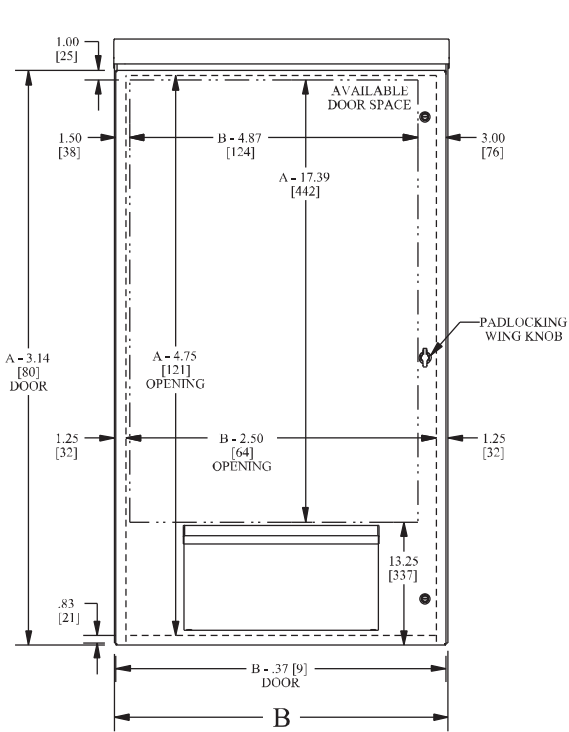

VIEW A-A