


Transformer Specifications	
PRIMARY VOLTAGE(S)	230x460 (TRIPLE RATED)
SECONDARY VOLTAGE(S)	115
RATED V.A.	750
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	26.5 LBS

TEST REQUIREMENTS	
WINDING	H4-H3 H2-H1 X2-X1
D.C. VOLTS	240 240 125.3
LOAD VOLTS	240 240 120
F.L. AMPS	1.858 1.858 6.250
HI-POT	4800V 3000V
EXCITING AMPS	0.65AMPS @ 240 VOLTS, 50HZ
EXCITING WATTS	33.0 MAX

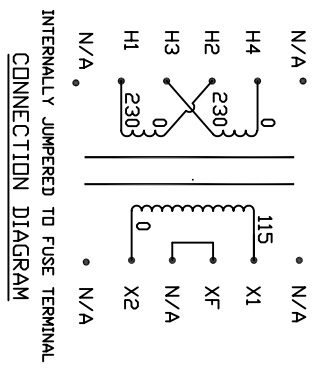

NOTE:
 1. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
 2. ALL MEASUREMENTS IN INCHES (MM)

MAIN PRODUCT IDENTIFICATION LABEL

PRIMARY IDENTIFICATION LABEL

SECONDARY IDENTIFICATION LABEL

MICRON IMPERVITRAN
 U.S. PAT. NO. 3,518,041
 750VA 50/60Hz
 TEMP CL. 130°C
 CAT. NO. B750BTZ13RBF
 SERIES 2
 LISTED TO2X
 UL US NO. 050082

REVISIONS	BY	DATE
A NEW	JUV	11/21/07

DATE	RELEASE AUTH.	ISSUE NO.	REVISED	APPROVED
11/21/07	JG.V	1		

MICRON INDUSTRIES CORPORATION
 TRANSFORMERS
 141 080665-4601 463015-1282
 www.MicronTransformers.com

SIZE SCALE C INDX
 B750BTZ13RBF